

UHF Dual Handheld Wireless Microphone



CS-520

Dual Handheld Wireless Microphone

AFS frequency automatic search function in dependently

Pre-set 162 CH (81x2)selectable frequencies.

CS-520 UHF Dual Handheld Wireless Microphone

Supports multiple meeting for :

- meeting Rooms
- Seminar
- Public relations
- Education institutions
- concerts, clubs and music entertainment
- church

CS-520

True Diversity Receiver



CS-520/HT

Handheld Transmitter

Optional

hand-held microphone

pocket transmitter

lavalier and headset available.




CS-520 UHF Dual Handheld Wireless Microphone



FEATURE

- UHF 794~806 MHz frequency range. (Brand for Thailand Regulation)
- AFS frequency automatic search function in dependently.
- The frequency can by synchronized between receiver and transmitter via infrared.
- LCD display shows status of frequency, AF and RF signal etc.
- PLL synthesized technique and digital pilot technique.
- Noise locked, Pilot Tone locked, and Squelch Control.
- Provide different nature and clean sound.
- Pre-set 162 CH (81×2) selectable frequencies.
- The power switch turn-on/off without silent noise.
- Ideal for professional stage, clubs and music entertainment etc.
- Optional hand-held microphone, pocket transmitter, lavalier and headset available.

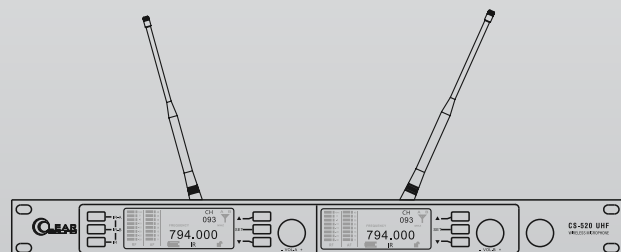

SPECIFICATIONS

Receiver	
Operating frequency	794-806MHz
Receiver mode	intermediate-frequency super heterodyne structure with twice conversions
The first intermediate frequency	110MHZ
The second intermediate frequency	10.7MHZ
Squelch limited	0-40dB
Spurious noise suppression	>80dB
Audio output	unbalance : +4db(1.25V)/5KΩ; balance : +10db(2.5V)/600Ω
Power requirement	DC12V/1A
Electricity	single receiver, <200mA; double receiver, <350mA
CS-520/HT : Handheld Transmitter	
Operating frequency	794-806MHz
Frequency adjusting	FM frequency
Available bandwidth	0.150MHz per channel
Channel number	162
Frequency stability	±0.005%
Dynamic range	>110dB
Peak frequency deviation	±45KHz
Frequency response	60Hz-18KHz(±3db)
Microphone Type	Dynamic
Polar Pattern	Cardioid Directional
S/N ratio	>105dB
T.H.D distortion	<0.5%
Transmitted power	15mW Aluminum alloy structure
Battery Voltage	3V (2×1.5V AA Battery)

UHF Dual Handheld Wireless Microphone



Represented by:

THAILAND:

SOUND VISION CO., LTD.
90 Soi Jaran Sanitwong, 49/1 Jaran Sanitwong Rd,
Bangumru, Bangplad, Bangkok 10700
TEL: 02-001-6147
EMAIL: info@soundvision.co.th
WEBSITE: www.soundvision.co.th

©2014-2015 SOUND VISION CO., LTD. | Data subject to change without notice.