



PASSIVE LINE ARRAY SUBWOOFER






TNA-1200S



Description	The TNA-1200S passive line array subwoofer features a HH designed 12" low frequency woofer with exceptional high output. Equipped with integrated rigging hardware, the TNA-1200S can be installed quickly and easily. The TNA-1200S offers a max SPL of 126 dB and offers a frequency response as low as 35Hz. When combined with the TNA-2051, the TNA-1200S offers an ideal venue installation or point source solution. Ideal for venues, schools, sports, gyms, hotels and more.	
Specifications		
Model	TNA-1200S	
System Type	12" Passive Subwoofer, Bass Reflex	
Frequency Response	35Hz - 2KHz (-10dB)	
	40Hz - 500Hz (-3dB)	
System Power Rating ¹	300W AES, 1200W Peak	
SPL 1W/1m ²	95 dB SPL	
Max SPL 1m ³	126 dB SPL	
Nominal System Impedance	8 ohms	
Input Connector	NL4 ±1 Twist Lock Connector	
Link Connector	NL4 ±1 Twist Lock Connector	
Speaker		
LF Driver	1x12" High sensitivity HH designed driver	
Recommended LPF Frequency	180Hz	
Enclosure		
Cabinet	15mm Plywood	
Finish	Painted Black (White finish optional, subject to MOQ)	
Mounting Bracket	TNA-BRK1	
Mounting Points	M8 fixings for included metal side brackets, and optional TNA-BRK1 flying bracket assembly	
Grille	1.5mm Thickness Steel, Hexagonal mesh, acoustic foam lined	
Unit dimensions (HWD)	365 x 460 x 470mm, 14.4" x 18.1" x 18.5"	
Unit weight	18.8Kg, 41.4 lbs	
Carton dimensions (HWD)	535 x 430 x 530mm, 21.1" x 16.9" x 20.9" , 0.122 M3	
Packed weight	22.5Kg, 49.6 lbs	

In the interest of continued development, HH reserves the right to amend product specification without prior notification.

DIMENSIONS (in mm)

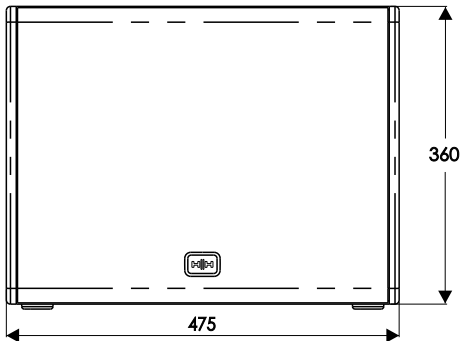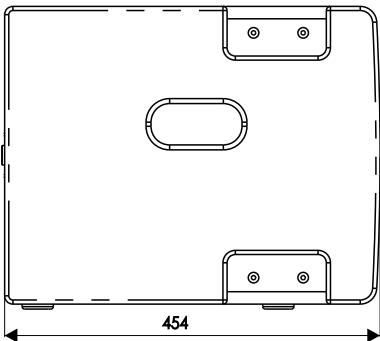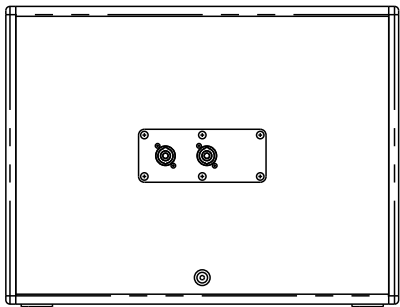


1 AES standard Pink Noise 12dB crest factor 2 hours
2 Measured in Full space (4π) conditions
3 Calculated maximum SPL based on rated power handling






SPL / IMPEDANCE

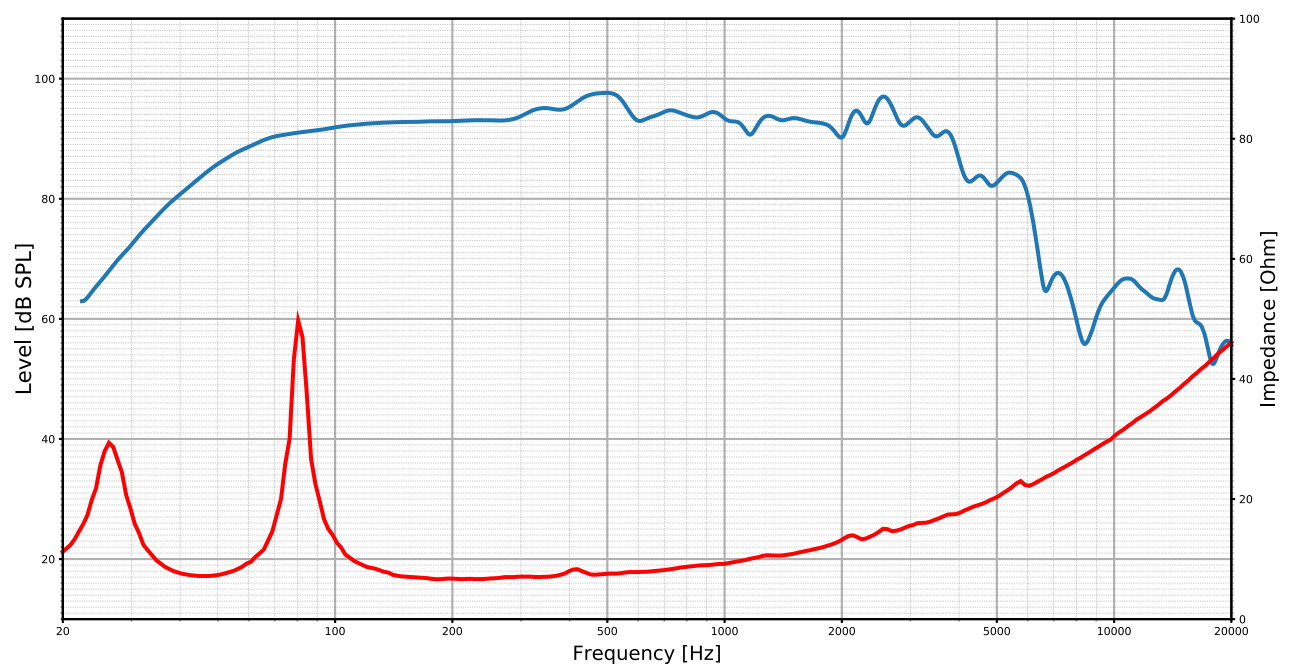

SYSTEM RESPONSE 1xTNA-1200S & 4xTNA-2051

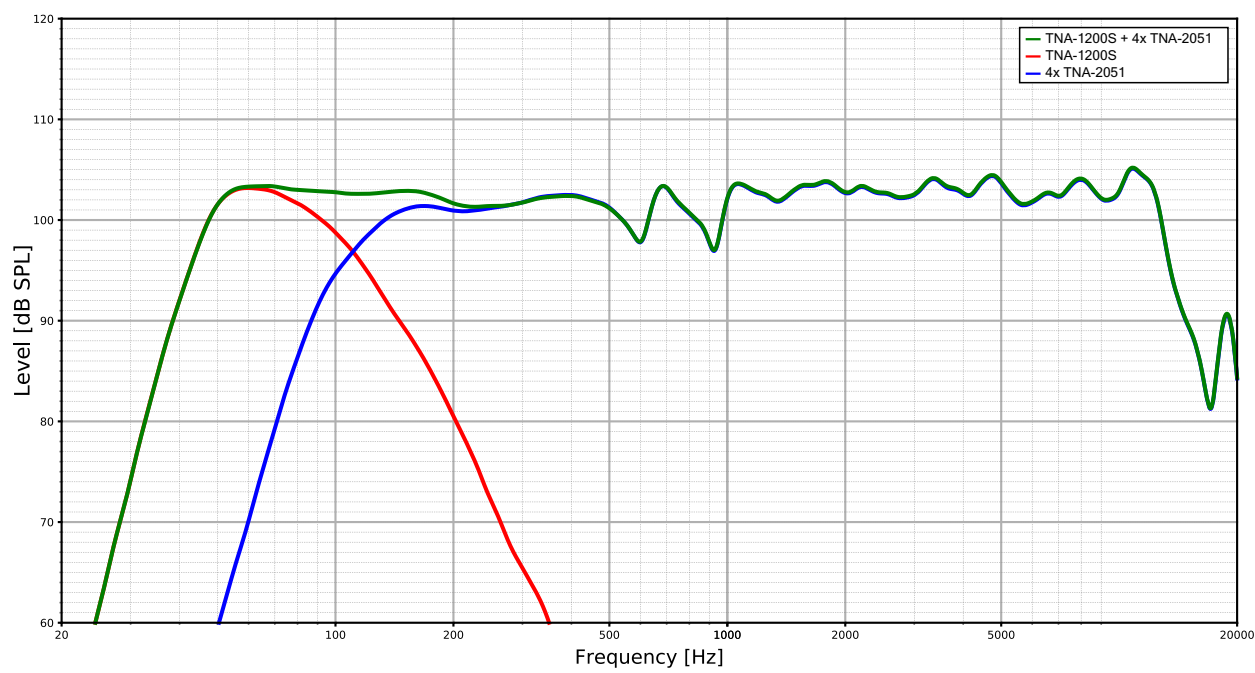




PASSIVE LINE ARRAY SUBWOOFER

T E S S E N
ARRAY

PHASE PLOT

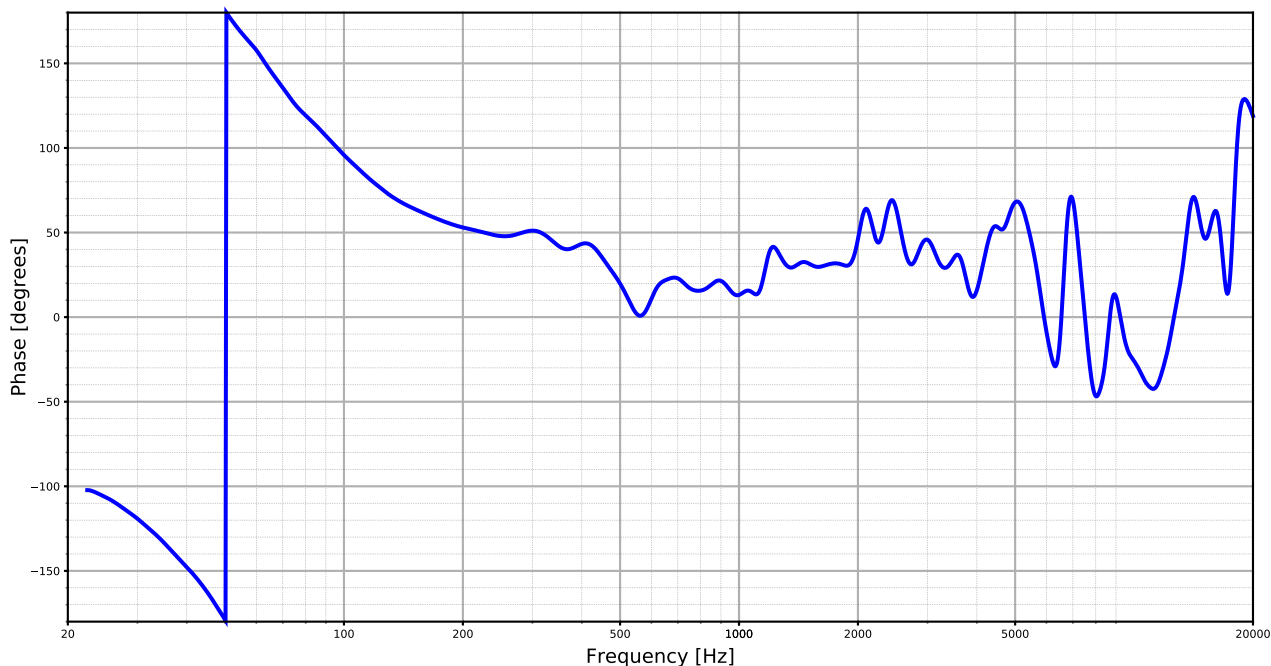

WIRING

