

Loudspeakers

Sub 10

Low-profile sub-bass loudspeaker



Optimal Audio



FEATURES

- Discreet size
- Punchy sub-bass extension
- Ideal where space is limited
- Great Sub support for smaller systems

Sub 10 is a slimline, passive 10" subwoofer designed for applications that call for increased impact and low frequency performance to the smaller Optimal Audio loudspeaker range. This visually unobtrusive enclosure makes it perfectly suited where space is limited such as under banquet seating.

It features a 10" (250mm) driver with a generously sized low frequency

port for reduced air noise. With a peak SPL of 127dB this is a truly punchy little sub and can be used on the ground, fixed to a wall or ceiling or flown using integral M8 inserts.

An impact-resistant perforated steel grille protects the driver, and rubber feet on the base resist movement. The Sub 10 enclosure is constructed from plywood and finished in black textured paint.

APPLICATIONS



Cafes



Bars/
Restaurants



Retail



Wedding
Venues



Hotels



Education
Facilities



Houses of
Worship




Museums



Fitness Studios



Residential




Loudspeakers

Sub 10

Low-profile sub-bass loudspeaker



Optimal Audio

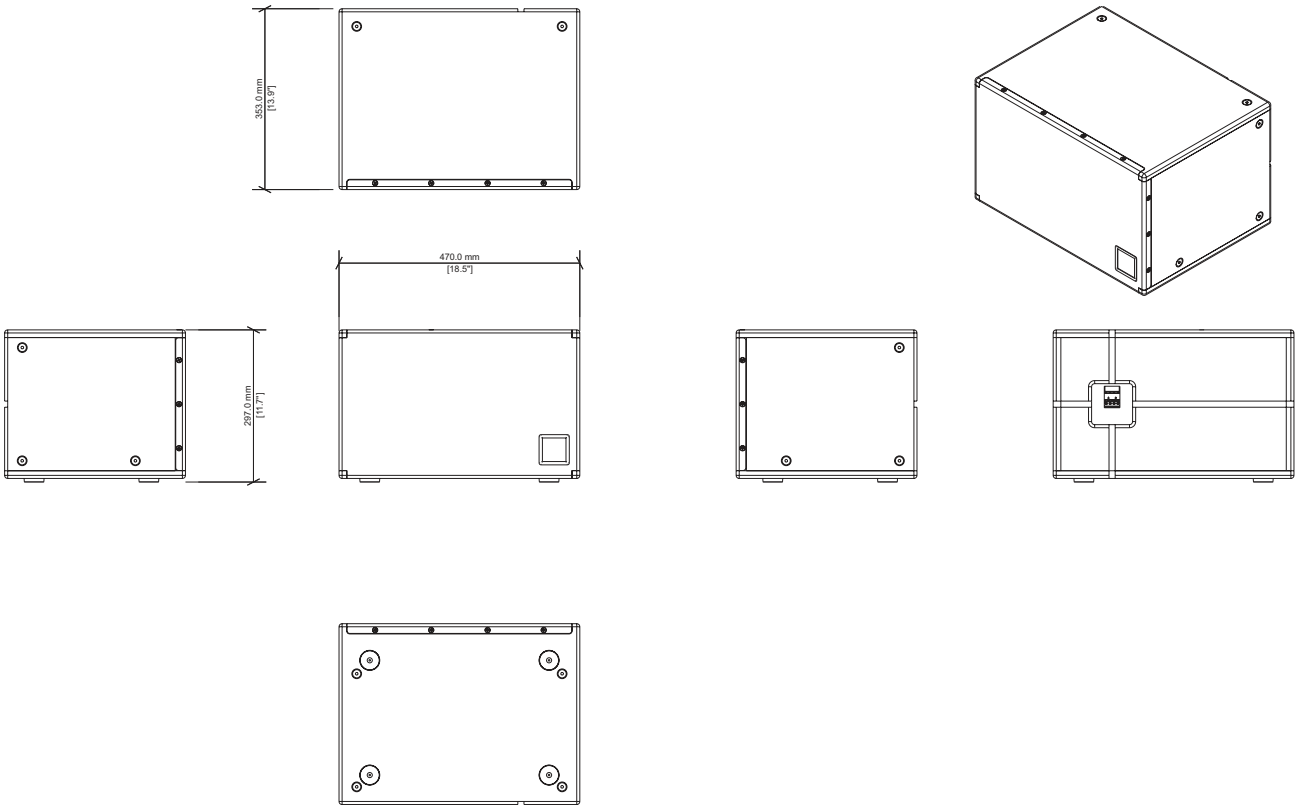

SPECIFICATIONS

TYPE	Sub-bass loudspeaker
FREQUENCY RESPONSE (with preset)	50Hz - 150Hz ± 3dB -10dB @ 42Hz
DRIVERS	LF: 10" (250mm)
RATED POWER (AES)	250W
NOMINAL IMPEDANCE	8 Ohms
SENSITIVITY (1W/1m)	97dB
MAXIMUM SPL	121dB (cont), 127dB (peak)
RECOMMENDED AMP	SmartAmp 30
ENCLOSURE	Plywood
FINISH	Black paint
PROTECTIVE GRILLE	Yes
CONNECTORS	Euroblock type
PIN CONNECTIONS (INPUT)	1+ 1-
FITTINGS	14 x M8, Inset bolts
DIMENSIONS	(W) 470mm x (H) 297mm x (D) 353mm (W) 18.5" x (H) 11.7" x (D) 13.9"
WEIGHT	12.9Kg (28.4lbs)
ACCESSORIES (available separately)	Sub Bracket (Pair) M8 Eye Bolt



Textured
Paint Finish



Weight

optimal-audio.co.uk

© 2021. Optimal Audio Group Ltd.