

# Broadcaster


Precision 1" Broadcast Condenser Microphone

## AUSTRALIA

107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

## USA

PO Box 91028, Long Beach CA 90809-1028  
Ph: +1 562 364 7400 Fax: +1 888 412 4664

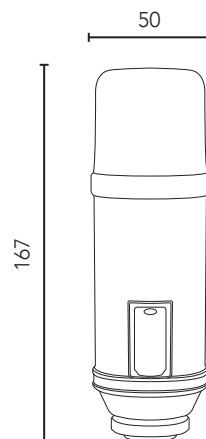

## Features


- HF2 1" capsule with gold plated diaphragm
- On-Air indicator LED
- Ultra low noise
- Voice tailored low-cut feature
- Internal pop-filter to reduce plosives
- Rugged stainless steel body
- Designed and manufactured in Australia
- Full 10 year warranty\*

## Specifications


|                     |                                                                            |
|---------------------|----------------------------------------------------------------------------|
| Acoustic Principle  | Pressure gradient                                                          |
| Directional Pattern | Cardioid - end address                                                     |
| Frequency Range     | 20 Hz-20 kHz                                                               |
| Sensitivity         | -34 dB re 1 Volt/Pascal (20 mV @ 94 dB SPL) +/- 2 dB @ 1kHz                |
| Output Impedance    | 40Ω                                                                        |
| Dimensions          | Length - 167mm (6.574")<br>Diameter - 50mm (1.968")                        |
| Output Connection   | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) |
| Shipping Weight     | 840g                                                                       |
| Net Weight          | 577g                                                                       |



## Polar Pattern

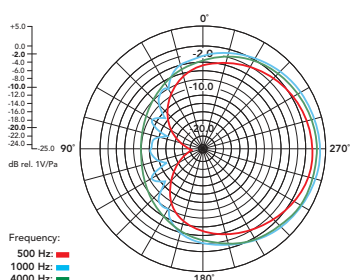

## Frequency Response

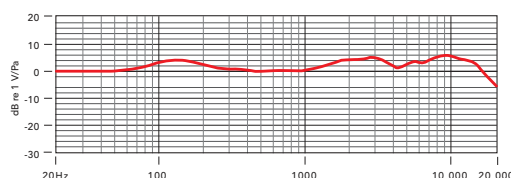

## Notes

\*Microphone must be registered at [www.rodemic.com](http://www.rodemic.com) to activate extended warranty.

**RODE**  
MICROPHONES