

NTK

Multi Award Winning Class A Dual 1" Condenser Microphone

AUSTRALIA

107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA

PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664



Features


- Large 1" (25mm) capsule with gold plated diaphragm
- Class "A" valve circuitry
- Hand selected and graded 6922 twin-triode valve
- Dedicated power supply
- Internal capsule shock mounting
- High level of RF rejection
- Ultra low noise
- Wide dynamic range
- High strength heat treated steel mesh head
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at www.rodemic.com/warranty

Specifications


Acoustic Principle	Pressure gradient
Directional Pattern	Cardioid
Frequency Range	20Hz ~ 20,000Hz
Sensitivity	-38dB $\pm$ 2dB re 1V/Pa (12mV @ 94 dB SPL) @ 1kHz
Nominal Impedance	200 Ω
Equivalent Noise	12dBA SPL (A - weighted per IEC651)
Maximum Output	+29dBu (@ 1% THD into 1k Ω)
Dynamic Range	>147dB (per IEC651)
Maximum SPL	>158dB (@ 1kHz, 1% THD into 1k Ω load)
Signal/Noise	>82dB SPL (A - weighted per IEC651)
Power Req.	Dedicated Power Supply (100 ~ 120V/200 ~ 240V, 50/60 Hz)
Dimensions	Length - 208mm Diameter - 55mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Shipping Weight	7.08kg
Net Weight	760g

Incl. Accessories


- RM2 stand mount
- RC2 case
- Transformer and lead

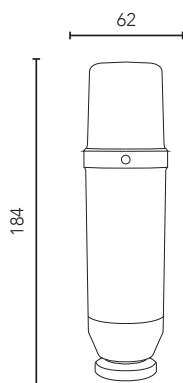

Polar Pattern



Frequency Response

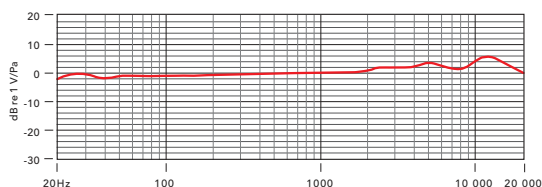

RØDE
MICROPHONES