

# Procaster


Broadcast Quality Dynamic Microphone

## AUSTRALIA

107 Carnarvon st, Silverwater NSW 2128 Australia  
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

## USA

PO Box 91028, Long Beach CA 90809-1028  
Ph: +1 562 364 7400 Fax: +1 888 412 4664

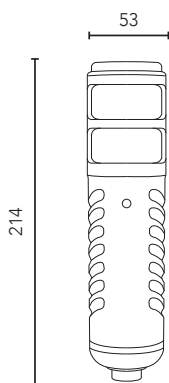

## Features

- Broadcast quality sound
- High output dynamic capsule
- Balanced, low impedance output
- Internal shock mounting of capsule for low handling noise
- Internal pop-filter to reduce plosives
- Robust, all metal construction
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at [www.rodemic.com/warranty](http://www.rodemic.com/warranty)


## Specifications

|                     |                                                                                  |
|---------------------|----------------------------------------------------------------------------------|
| Acoustic Principle  | Dynamic                                                                          |
| Directional Pattern | Cardioid                                                                         |
| Frequency Range     | 75Hz ~ 18,000Hz                                                                  |
| Sensitivity         | -56dB $\pm$ 2dB re 1V/Pa @ 1kHz<br>(1.6mV/Pa @ 94dB SPL)                         |
| Output Impedence    | 320 $\Omega$                                                                     |
| Dimensions          | Length - 214mm (8.425")<br>Diameter - 53mm (2.086")                              |
| Output Connection   | 3 pin XLR, balanced output<br>between Pin 2 (+), Pin 3 (-) and<br>Pin 1 (ground) |
| Shipping Weight     | 1,100g                                                                           |
| Net Weight          | 695g                                                                             |

## Incl. Accessories

- RM2 stand mount
- ZP1 zip pouch

## Polar Pattern

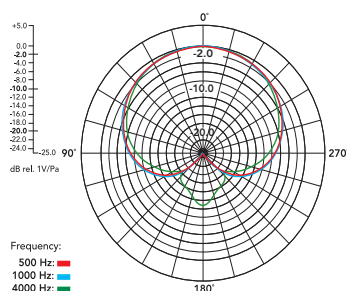

## Frequency Response

