



The Future of Audio




TEAMCONNECT CEILING 2

Raise your meetings
to a higher level

TeamConnect Ceiling 2


Raise your meetings to a higher level

TeamConnect Ceiling 2 is a reliable ceiling microphone solution that is quick and easy to install. Thanks to the patented auto-adjusting beamforming technology, it adapts to the respective conditions on-site, without reconfiguration. Gain more flexibility and complete „freedom of speech“ in your conference rooms for an individual work environment and maximum productivity.

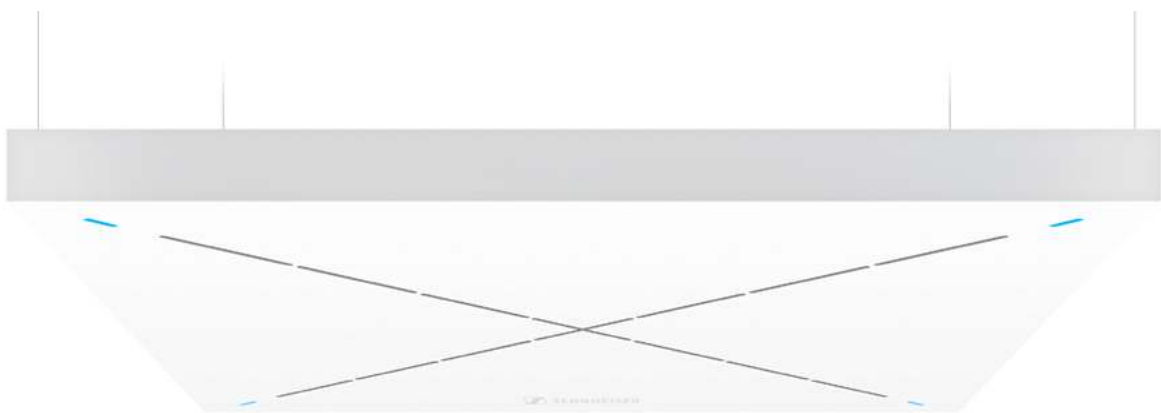

Speak
freely

Thanks to the unique patented **automatic beamforming technology**, your messages are clearly transmitted to external meeting participants from anywhere in the meeting room.



Everything
under control

Focus on the essentials while the **Sennheiser Control Cockpit** software helps you control and monitor the microphone in any company network.



Perfect
integration

100% connectivity with redundant **Dante™** support for outstanding productivity and reliability. Integrates into any conference system and **digital audio networks**.




Easy
to install

The ceiling microphone comes with **PoE** support and integrates easily into your existing **media control** environment.


Specifications

Dimensions (L x B x H)	590 x 590 x 43 mm (23.2" x 23.2" x 1.7")
Weight	5670 g (12.5 lbs)
Supply voltage	44 – 57 V DC PoE IEEE 802.3af Class 3
Transducer principle	Pre-polarized condenser microphone
Microphone capsules	28 x KE 10-237
Sensitivity	0 dBV/Pa (988 mV/Pa)
Pick-up pattern	Beam pattern
Max. sound pressure level	104 dB SPL
Dynamic range	93 dB (A)

Connections

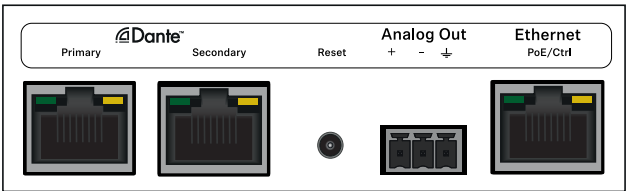


Dante™	Dante™ interface with two RJ-45 sockets Primary and Secondary
Reset	Factory reset switch
Analog out	3-pin terminal for analog audio out
Ethernet	RJ-45 socket for network control and PoE

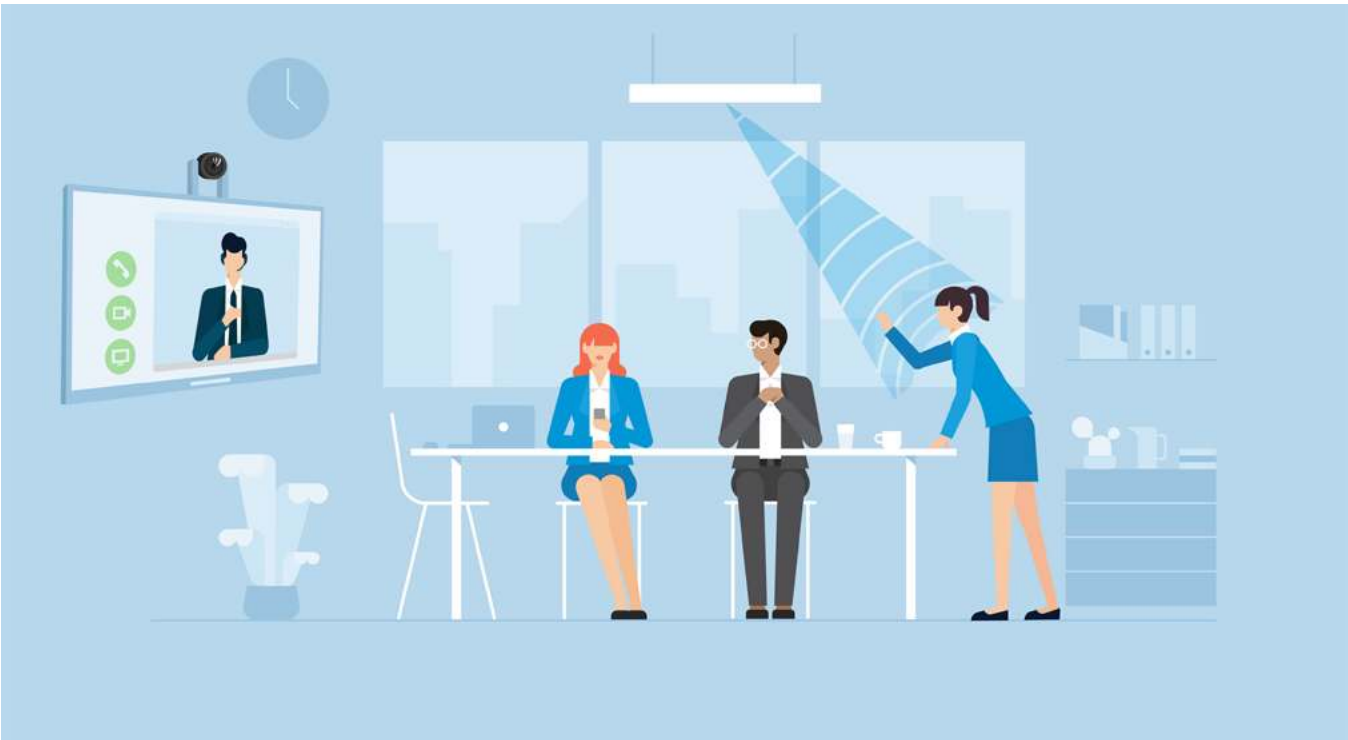


Videoconference with remote participants via TeamConnect Ceiling 2

Collaboration Spaces



Meeting Rooms



Board Rooms

