




## PROFESSIONAL INSTALLATION LOUDSPEAKERS

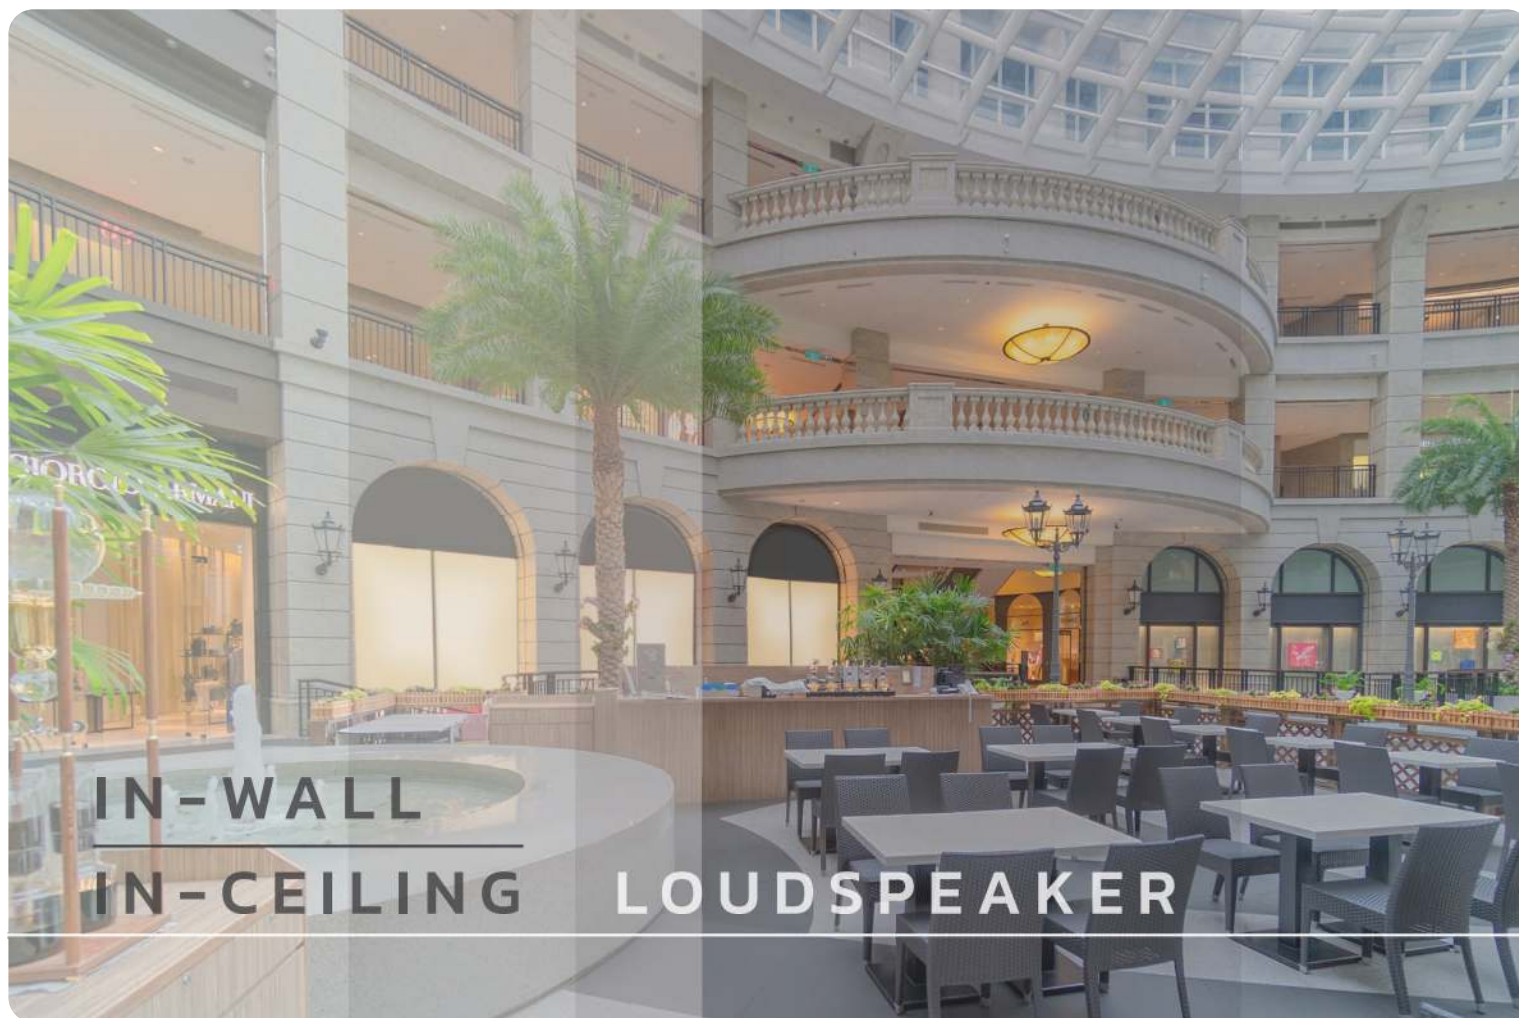

IN-WALL

IN-CEILING

LOUDSPEAKER



# CNI-62


## COAXIAL CEILING SPEAKER

6-INCH 2-WAY  
LINE 70V/100V  
30WATTS @8Ω



- 6-inch 2-Way Coaxial ceiling speaker for installation
- Elegant design ceiling loudspeaker "Borderless"
- Magnetic grille to make installation easier.
- High-quality sound.
- Frequency response 70Hz~18KHz
- Transformer taps 70V, 100V

|                              |                                                                              |
|------------------------------|------------------------------------------------------------------------------|
| Speaker type                 | Coaxial ceiling loudspeaker. Two-Way                                         |
| Rated power                  | 30W                                                                          |
| Line voltage                 | 70V / 100V                                                                   |
| Transformer taps             | 70V : 30W/15W/7.5W/3.75W/1.88W , 30W@8Ω<br>100V: 30W/15W/7.5W/3.75W , 30W@8Ω |
| Frequency response           | 70Hz ~ 18kHz (~3dB)                                                          |
| Sensitivity 1W/1 m           | 90 ±3dB                                                                      |
| Maximum SPL/1m (calc)        | 110dB                                                                        |
| Coverage (Nominal -6 dB) H   | 160° (±5°)                                                                   |
| Coverage (Nominal -6 dB) V   | 150° (±5°)                                                                   |
| Driver LF Transducer         | 1 x 6-inch (Woven Kevlar Cone)                                               |
| Driver HF Transducer         | 1 x 1-inch (Silk dome)                                                       |
| Nominal impedance (Passive)  | 8Ω                                                                           |
| Operating temperature        | -20 °C to +55 °C                                                             |
| Connections                  | Phoenix connector                                                            |
| Indoor applications          | Yes                                                                          |
| Color                        | White                                                                        |
| Cabinet material             | ABS enclosure                                                                |
| Front grille                 | Metal grille                                                                 |
| Dimensions hole for mounting | Φ205mm                                                                       |
| Dimensions                   | Φ235 x H 101mm (without bracket)                                             |
| Weight                       | 1.6 Kg                                                                       |



Elegant design  
ceiling speaker  
"Borderless"

CNI-62 Applications designed suitable, such as hotels, restaurants, bars, lounges, training and conference rooms, or shopping centers.

# CSI-06

## CEILING LOUDSPEAKER

6-INCH



LINE 100 VOLT

6WATTS @8Ω



- 6-inch ceiling loudspeaker for installation
- Elegant design.
- Easy to installation
- High-quality sound.
- Frequency response 110Hz~15KHz
- Transformer taps 100V: 6W/3W , 6W@8Ω

|                              |                                   |
|------------------------------|-----------------------------------|
| Speaker type                 | Ceiling loudspeaker               |
| Rated power                  | 3W, 6W                            |
| Line voltage                 | 100V                              |
| Transformer taps             | 100V : 6W/3W , 6W@8Ω              |
| Frequency response           | 110Hz ~ 15kHz (-3dB)              |
| Sensitivity 1W/1 m           | 90 ±3dB                           |
| Maximum SPL/1m (calc)        | 97dB                              |
| Coverage (Nominal -6 dB) H   | 160° (±5°)                        |
| Coverage (Nominal -6 dB) V   | 150° (±5°)                        |
| Speaker driver               | 6-inch                            |
| Nominal impedance (Passive)  | 8Ω                                |
| Operating temperature        | -20 °C to +55 °C                  |
| Connections                  | A length of connecting cable      |
| Indoor applications          | Yes                               |
| Color                        | White                             |
| Cabinet material             | ABS enclosure                     |
| Front grille                 | Metal grille                      |
| Dimensions hole for mounting | Φ165mm                            |
| Dimensions                   | Φ190 x H 105 mm (without bracket) |
| Weight                       | 1.47 Kg                           |

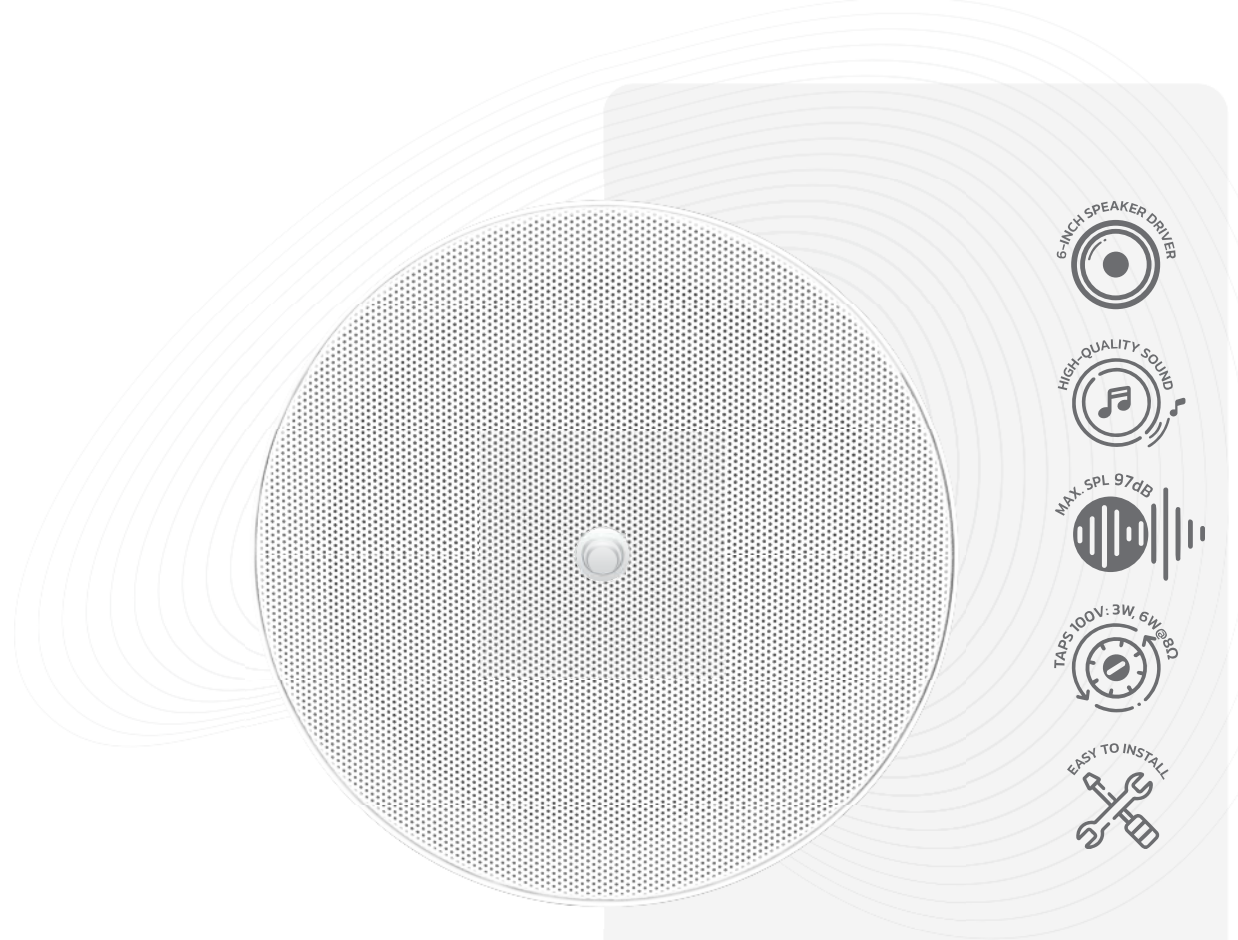

CSI-06 Applications designed suitable, such as hotels, restaurants, bars, lounges, training and conference rooms, or shopping centers.

# CLI-4260

## COLUMN LOUDSPEAKER

6-INCH 2-WAY  
LINE 70V/100V  
30WATTS @4Ω



- All-weather versatility IP65\*
- High sensitivity.
- Transformer Taps 70V, 100V
- 3-inch LF transducer 15 Watts RMS
- 2-inch HF transducer 5 Watts RMS
- Power Handling 60Watts
- Frequency Response 160Hz ~ 16kHz
- Coverage 120°(H) x 80°(V)
- Easy and secure wall mount installation in the outdoor area through the supplied strong metal mounting brackets.

|                             |                                                                                  |
|-----------------------------|----------------------------------------------------------------------------------|
| Speaker type                | Column loudspeaker. Two-Way                                                      |
| Transformer taps            | 70V : 30W/20W/10W/ 5W/2W , 30W@4Ω<br>100V : 60W/40W/20W/ 10W/5W , 60W@4Ω         |
| Frequency response          | 160Hz ~ 16kHz (-3dB)                                                             |
| Sensitivity 1W/1 m          | 89dB                                                                             |
| Maximum SPL/1m (calc)       | 107dB                                                                            |
| Coverage (Nominal -6 dB) H  | 120° (±5°)                                                                       |
| Coverage (Nominal -6 dB) V  | 80° (±5°)                                                                        |
| System power handling       | 90W Max. / 60W continuous                                                        |
| Driver LF Transducer        | 4 x 3-inch Waterproof<br>(long-throw polypropylene cone)                         |
| Driver HF Transducer        | 1 x 2-inch (Silk dome)                                                           |
| Nominal impedance (Passive) | 4Ω                                                                               |
| Connections                 | A length of connecting cable                                                     |
| Operating temperature       | -20 °C to +55 °C                                                                 |
| All-weather versatility     | IP65*                                                                            |
| Indoor / Outdoor            | Yes                                                                              |
| Color                       | Black or white                                                                   |
| Cabinet material            | Aluminum alloy cabinet, engineering -<br>plastics (ABS) for top and bottom cover |
| Front grille                | Aluminum alloy protection grille                                                 |
| Dimensions (H x W x D)      | 606 x 109 x 102mm (without bracket)                                              |
| Weight                      | 3 Kg                                                                             |



CLI-4260 Applications designed suitable, such as hotels, restaurants, bars, lounges, training and conference rooms, or shopping centers.

# SVS-62W

## SURFACE-MOUNT SPEAKER

6.5-INCH 2-WAY  
LINE 70V/100V  
160WATTS MAX

- Passive Two-Way Full-range Loudspeaker.
  - Elegant design.
  - Indoor and outdoor applications.
  - All-weather versatility IP54\*
  - High-quality sound. / High sensitivity.
  - Transformer Taps 70V, 100V
  - 6.5-inch LF transducer 60Watts rms
  - 1-inch HF transducer 20Watts rms
  - Power Handling 160Watts
  - Frequency Response 50Hz ~ 20kHz
  - coverage H 90° x V 60°
- \*SVS-62WP

|                             |                                                                |
|-----------------------------|----------------------------------------------------------------|
| All-weather versatility     | IP54 *                                                         |
| Color                       | Black                                                          |
| Input Connections           | Euro block                                                     |
| Speaker Type                | Full-range, Mid-High, Two-Way                                  |
| Transformer Taps            | 70V : 40W, 20W, 10W, 5W<br>100V : 80W, 40W, 20W, 10W 8Ω Bypass |
| Frequency Response          | 65Hz ~ 20kHz (-3dB)<br>50Hz ~ 20kHz (-10dB)                    |
| Sensitivity 1 W/1 m         | 93 dB                                                          |
| Max. SPL/1m (calc)          | 118 dB                                                         |
| Coverage (Nominal -6 dB) H  | 90° (±45°)                                                     |
| Coverage (Nominal -6 dB) V  | 60° (±30°)                                                     |
| System Power Handling       | 160W Max. / 80W continuous                                     |
| LF Transducer               | 6.5-inch Waterproof Paper Cone (Glass fiber cone technology)   |
| HF Transducer               | 1-inch (Silk dome)                                             |
| Nominal Impedance (Passive) | 8Ω                                                             |
| Indoor / Outdoor            | Yes                                                            |
| Material                    | Engineering-plastics (ABS)                                     |
| Dimensions (H x W x D mm)   | 196 x 300 x 330mm (without bracket)                            |
| Weight                      | 10 Kg/ pair, 5 Kg / Single                                     |



SVS-62W Applications designed suitable, such as Meeting Room, Conference Room, Training Rooms, Hotels, Health clubs, Retail shops, Shopping malls & Plaza, Restaurant & Bar.


# SVS-82W

## SURFACE-MOUNT SPEAKER

8-INCH 2-WAY  
LINE 70V/100V  
180WATTS MAX

- Passive Two-Way Full-range Loudspeaker.
  - Elegant design.
  - Indoor and outdoor applications.
  - All-weather versatility IP54\*
  - High-quality sound. / High sensitivity.
  - Transformer Taps 70V, 100V
  - 8-inch LF transducer 65Watts rms
  - 1-inch HF transducer 25Watts rms
  - Power Handling 180Watts
  - Frequency Response 45Hz ~ 20kHz
  - coverage H 90° x V 60°
- \*SVS-82WP

|                             |                                                                |
|-----------------------------|----------------------------------------------------------------|
| All-weather versatility     | IP54 *                                                         |
| Color                       | Black                                                          |
| Input Connections           | Euro block                                                     |
| Speaker Type                | Full-range, Mid-High, Two-Way                                  |
| Transformer Taps            | 70V : 40W, 20W, 10W, 5W<br>100V : 80W, 40W, 20W, 10W 8Ω Bypass |
| Frequency Response          | 55Hz ~ 20kHz (−3dB)<br>45Hz ~ 20kHz (−10dB)                    |
| Sensitivity 1 W/1 m         | 94 dB                                                          |
| Max. SPL/1m (calc)          | 120 dB                                                         |
| Coverage (Nominal −6 dB) H  | 90° (±45°)                                                     |
| Coverage (Nominal −6 dB) V  | 60° (±30°)                                                     |
| System Power Handling       | 180W Max. / 90W continuous                                     |
| LF Transducer               | 8-inch Waterproof Paper Cone (Glass fiber cone technology)     |
| HF Transducer               | 1-inch (Silk dome)                                             |
| Nominal Impedance (Passive) | 8Ω                                                             |
| Indoor / Outdoor            | Yes                                                            |
| Material                    | Engineering-plastics (ABS)                                     |
| Dimensions (H x W x D mm)   | 240 x 335 x 390mm (without bracket)                            |
| Weight                      | 11 Kg/ pair, 5.5 Kg / Single                                   |



SVS-82W Applications designed suitable, such as Meeting Room, Conference Room, Training Rooms, Hotels, Health clubs, Retail shops, Shopping malls & Plaza, Restaurant & Bar.



SOUNDVISION™

PROFESSIONAL INSTALLATION LOUDSPEAKERS

## SOUND VISION CO., LTD.

9 Chaiyaphruek Rd., Taling Chan, Taling Chan, Bangkok 10170 Thailand

Support : 02-433-9988

Line-at : @soundvision

Email : [info@soundvision.co.th](mailto:info@soundvision.co.th)

[www.soundvisionpro.com](http://www.soundvisionpro.com)

