

Install

VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications



- Large scale horn loaded subwoofer for touring and installation applications
- 2,000 Watts continuous, 8,000 Watts peak power
- Twin 15" drivers for extended low frequency response to 40 Hz
- Extremely efficient horn design for maximum sound pressure levels
- Ideal for foreground music playback in clubs, bars, theatres and AV applications
- Internally braced plywood enclosure
- Finished with a hard wearing semi matt black paint finish
- Rugged powder coated perforated steel mesh grille
- Integral M10 rigging points for ease of installation
- Handles ergonomically integrated into sides of the cabinet
- Neutrik speakON* NL4 and barrier strip connectors for input and link output
- 10-Year Warranty Program*
- Designed and engineered in the U.K.

The 8,000-Watt VSX215B is a direct radiating passive twin 15" subwoofer that is ideally suited for a broad range of speech and music sound reinforcement applications in both fixed, portable, and touring audio systems. VSX215B's superb low frequency reproduction makes it the perfect choice for deployment in clubs, bars, theatres and AV applications.



Stunning Performance

A dual ported bass reflex system, the VSX215B features dual high powered 15" low frequency drivers that provide extended low frequency response down to 40 Hz – for chest-pounding bass. Fast and accurate transient response enables the VSX215B subwoofer to generate massive quantities of tight low end output that is virtually distortion-free.

*All third-party trademarks are the property of their respective owners. Their use neither constitutes a claim of the trademark nor affiliation of the trademark owners with MUSIC Tribe. Product names are mentioned solely as a reference for compatibility, effects and/or components. Warranty details can be found at musictribe.be.

Install

VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications

Versatility

VSX215B Subwoofers can be easily deployed in a multitude of configurations, thanks to the integral M10 rigging points. For touring and portable applications, the enclosures also feature strategically placed carry handles, which are ergonomically integrated into the sides of each cabinet.



Construction and Connectivity

Finished in a hard wearing semi matt black paint, the cabinet is constructed of internally braced plywood and includes a rugged powder coated perforated steel mesh grille. The rear panel connector plate carries Neutrik speakON® NL4 and barrier strip connectors for input and link connections to accommodate additional subwoofer, or satellite full range loudspeakers.

You Are Covered


We always strive to provide the best possible Customer Experience. Our products are made in our own [MUSIC Tribe](#) factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous [Warranty program](#).




VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications

Frequency Response Sensitivity 1 W / 1 m

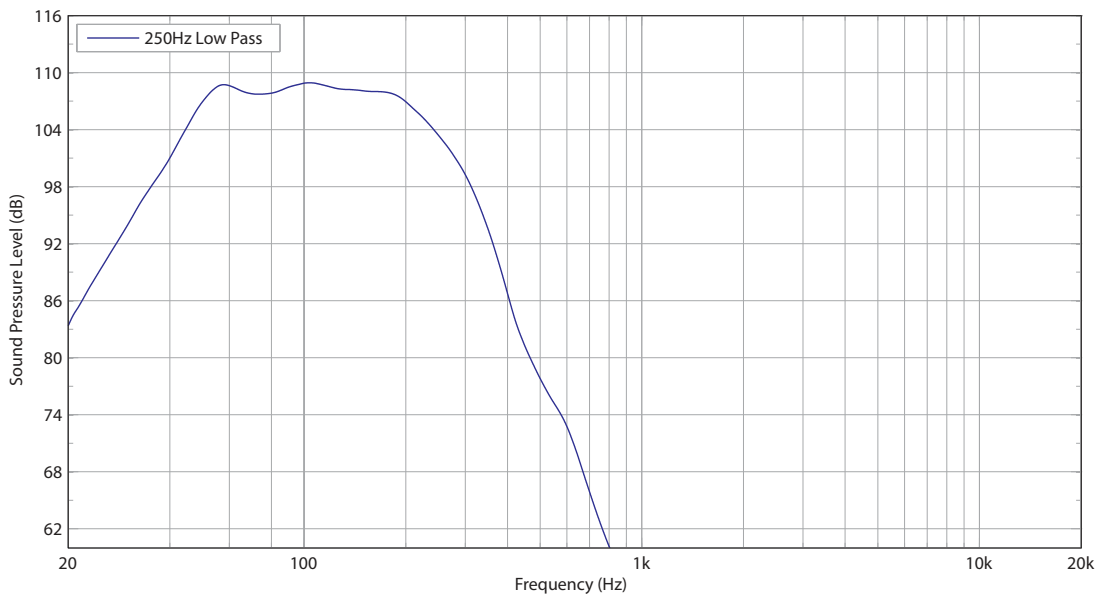

Impedance

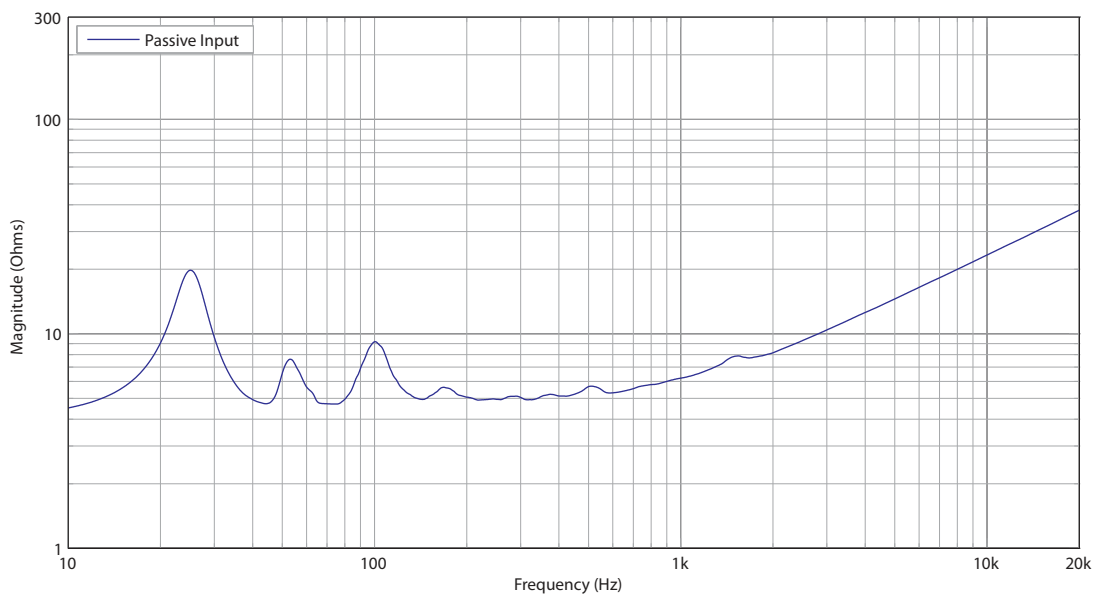


Install

VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications

Dimensions

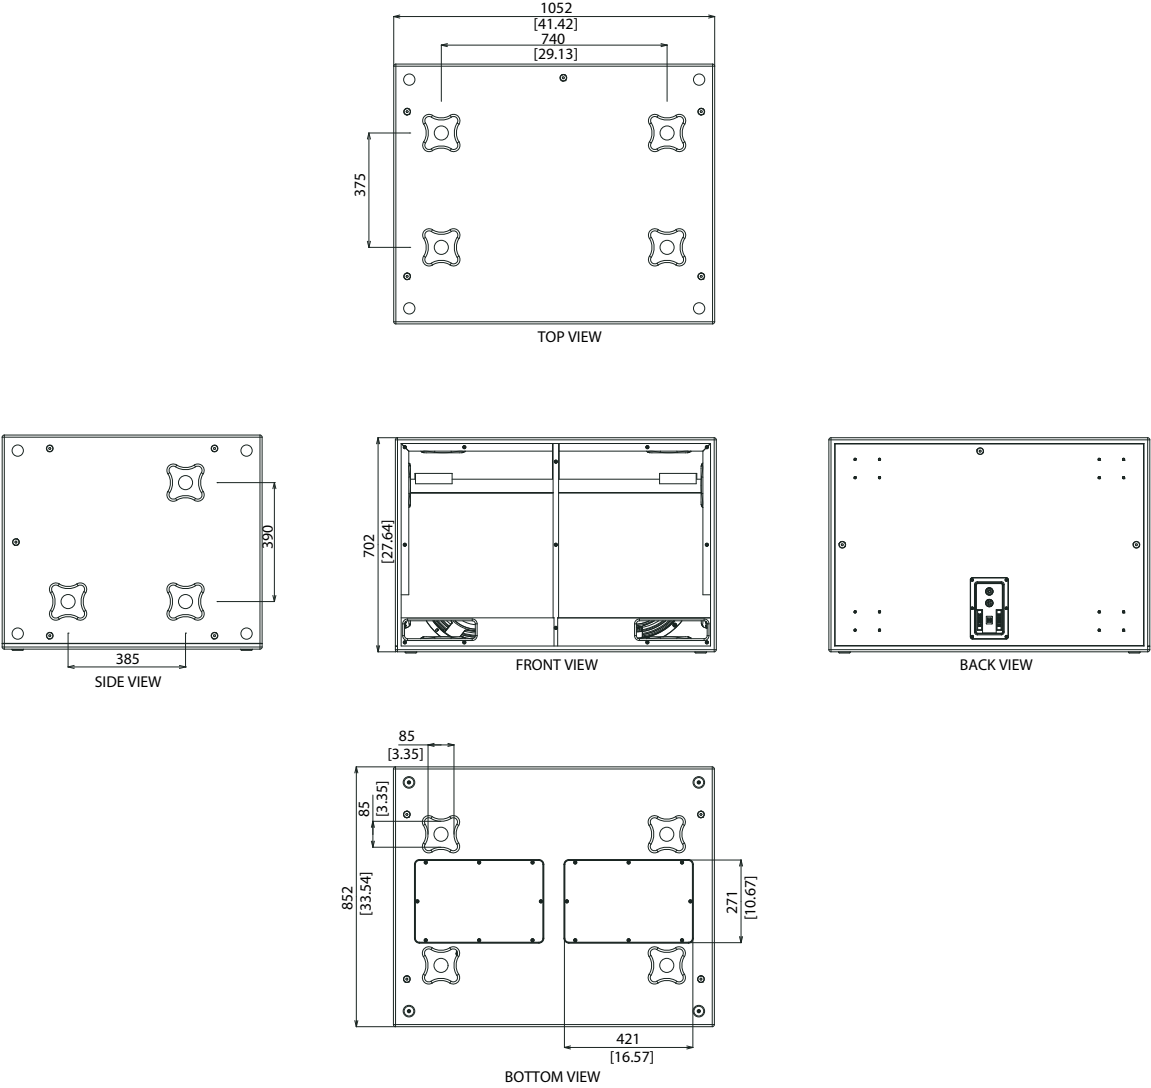

Install

VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications


Technical Specifications

System		Enclosure	
Frequency Response	48 Hz – 350 Hz, ±3 dB 40 Hz – 450 kHz, -10 dB	Connectors	2 x Neutrik speakON* NL4 2 x barrier strip terminals
Recommended Low Pass Crossover	90 – 250 Hz, 24 dB/Oct	Wiring	
Nominal Dispersion	Half space	Parallel	Pins 1+ / 1- input, pins 2+ / 2- link
Power Handling (IEC)	2000 W continuous, 8000 W peak	Discrete	Pins 1+ / 1- input (SUB 1), pins 2+ / 2- input (SUB 2)
Sensitivity	108 dB (1 W @ 1 m)	Dimensions H x W x D	708 x 1052 x 851 mm (27.9 x 41.4 x 33.5")
Maximum SPL	141 dB continuous, 147 dB peak	Net weight	90.2 kg (198.4 lbs)
Impedance	4 Ω (parallel) 2 x 8 Ω (discrete)	Construction	18 mm (¾") plywood
Components	2 x 15" (381 mm) LF driver	Finish	Semi matt black paint
		Grille	Powder coated perforated steel
		Flying Hardware	M10 x 22 points
		Accessories	
		Blanking plate for optional VTH pole mount	

Install

VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications

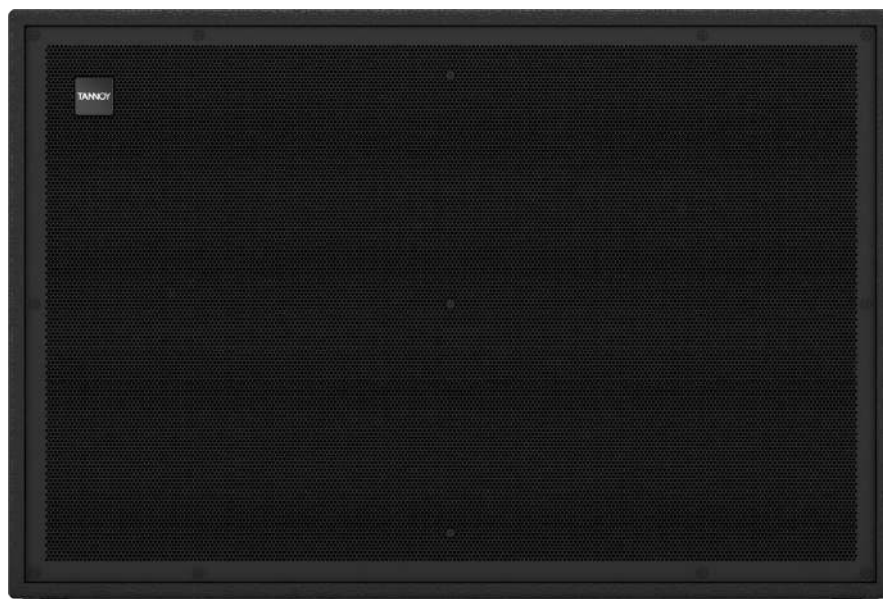

VSX215B


Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications



Install

VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications

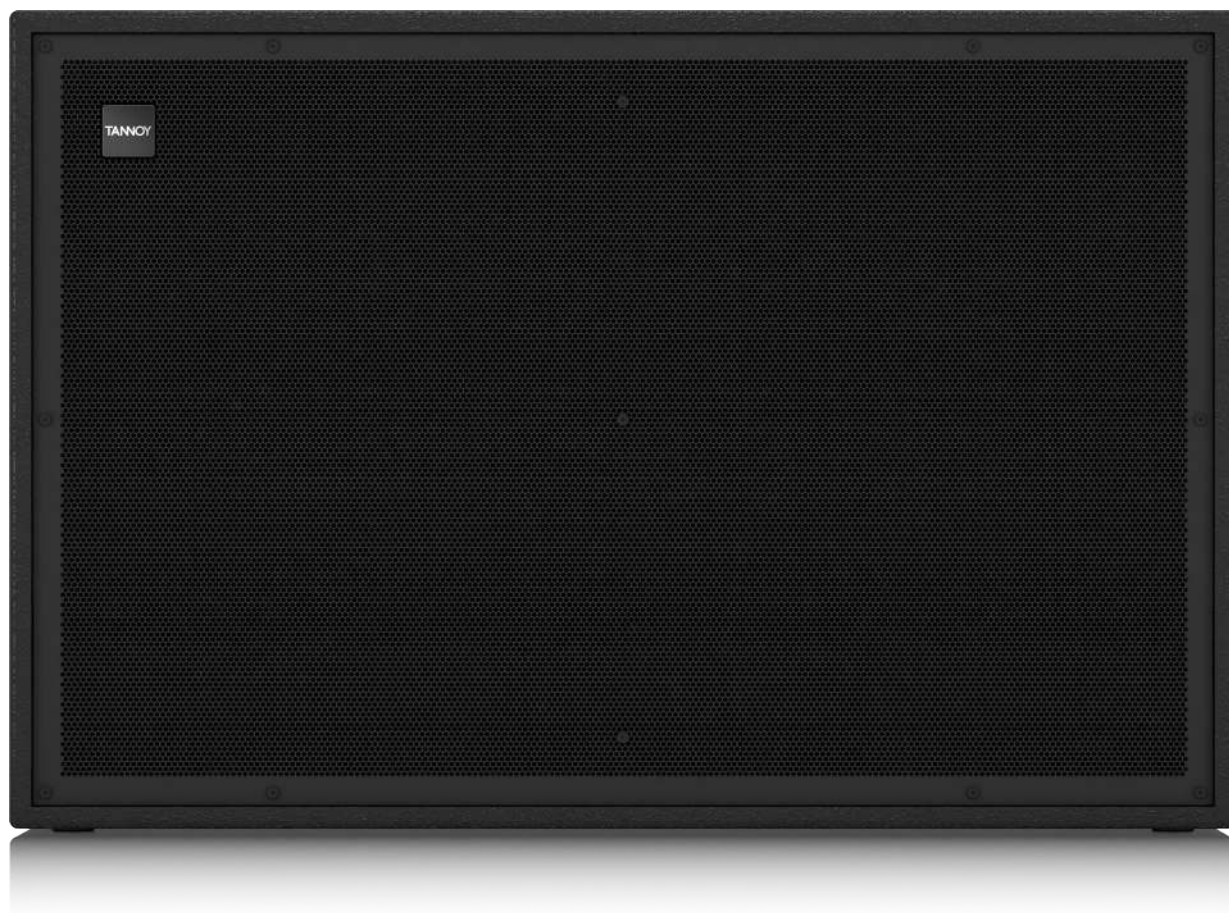

Install

VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications



Install

VSX215B

Twin 15" Horn Loaded Passive Subwoofer
for Touring and Installation Applications



For service, support or more information contact the TANNOY location nearest you:

Europe
MUSIC Tribe Brands UK Ltd.
 Tel: +44156 273 2290
 Email: CARECrea@music-group.com
 CAREEnte@music-group.com
 CARELife@music-group.com

USA/Canada
MUSIC Tribe Commercial NV Inc.
 Tel: +1 702 800 8290
 Email: CARECrea@music-group.com
 CAREEnte@music-group.com
 CARELife@music-group.com

Japan
MUSIC Tribe Services JP K.K.
 Tel: +81 3 6231 0453
 Email: CARECrea@music-group.com
 CAREEnte@music-group.com
 CARELife@music-group.com

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Tribe Global Brands Ltd. © MUSIC Tribe Global Brands Ltd. 2018 All rights reserved.

TANNOY