

DESCRIPTION


TOA speaker selector SS-2010 is a 10 zone BGM and 10 zone paging speaker selector. This highly efficient speaker selector can be installed with the public address system in schools, malls, offices, and places requiring the selection of speakers.

SPECIFICATIONS


Voltage Source		24 V DC
Current Consumption		0.6 A DC
Inputs		10 Inputs BGM
		10 Inputs Paging
Output		10 Outputs, each output channel max 480W at 100V line
Controls	Front	10 BGM Selectors
		10 Paging Selectors
		1 All Call Selector for All Paging
	Rear	1-10 Paging Controls In
		All Paging Control In for All Paging
Indicator Led		10 BGM Selector LEDs
		10 Paging Selector LEDs
		1 All Call LED
Operating Temperature		0°C to +40°C
Finish		Front Panel : Aluminum Hair Line, Etching Black
		Case : Steel Plate, Painting Black
Dimensions		420 (W) X 44 (H) X 320 (D) in mm
Weight		3.2 kg
Accessories		6P Connectors (12 Pcs)
		2P Connector (1 Pc)

APPEARANCE


Rear View

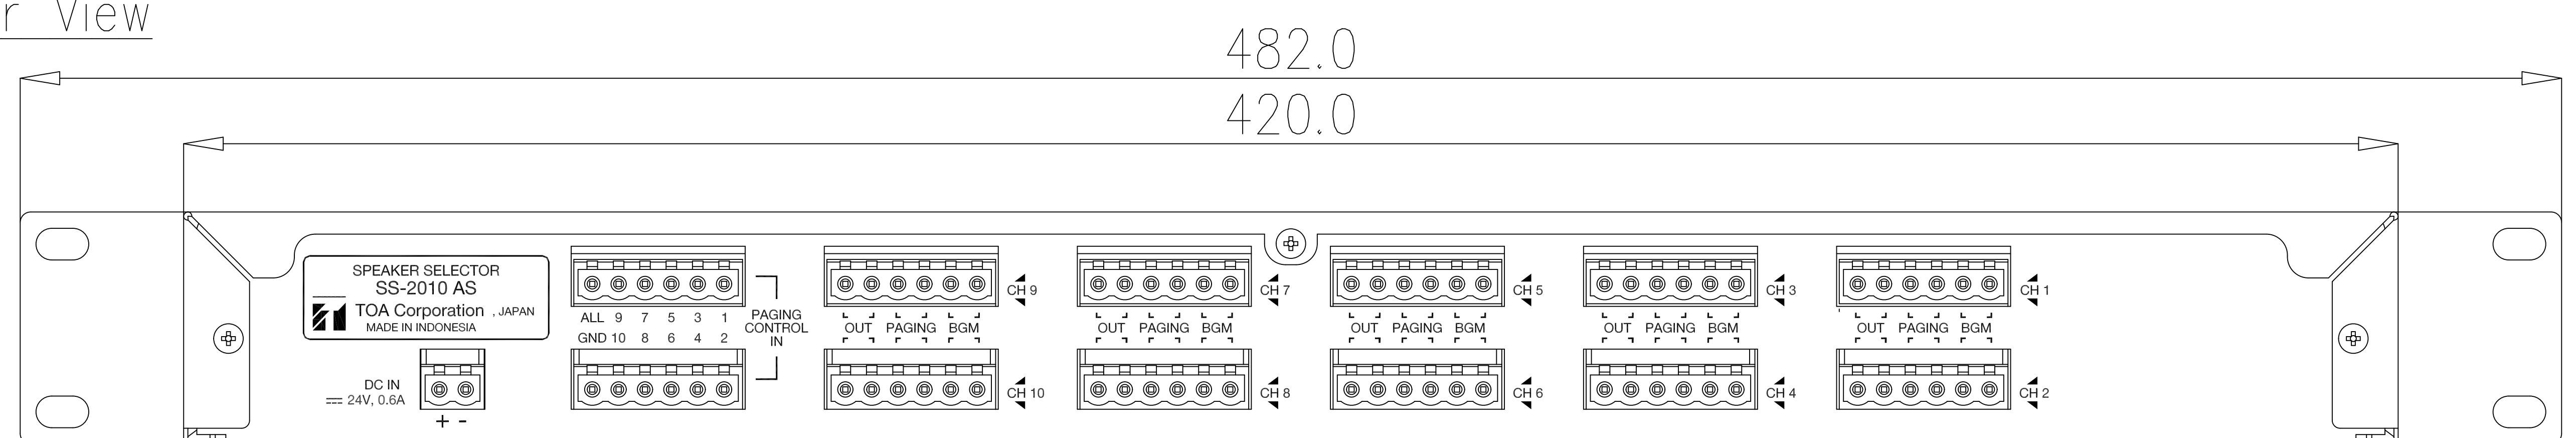

Front View

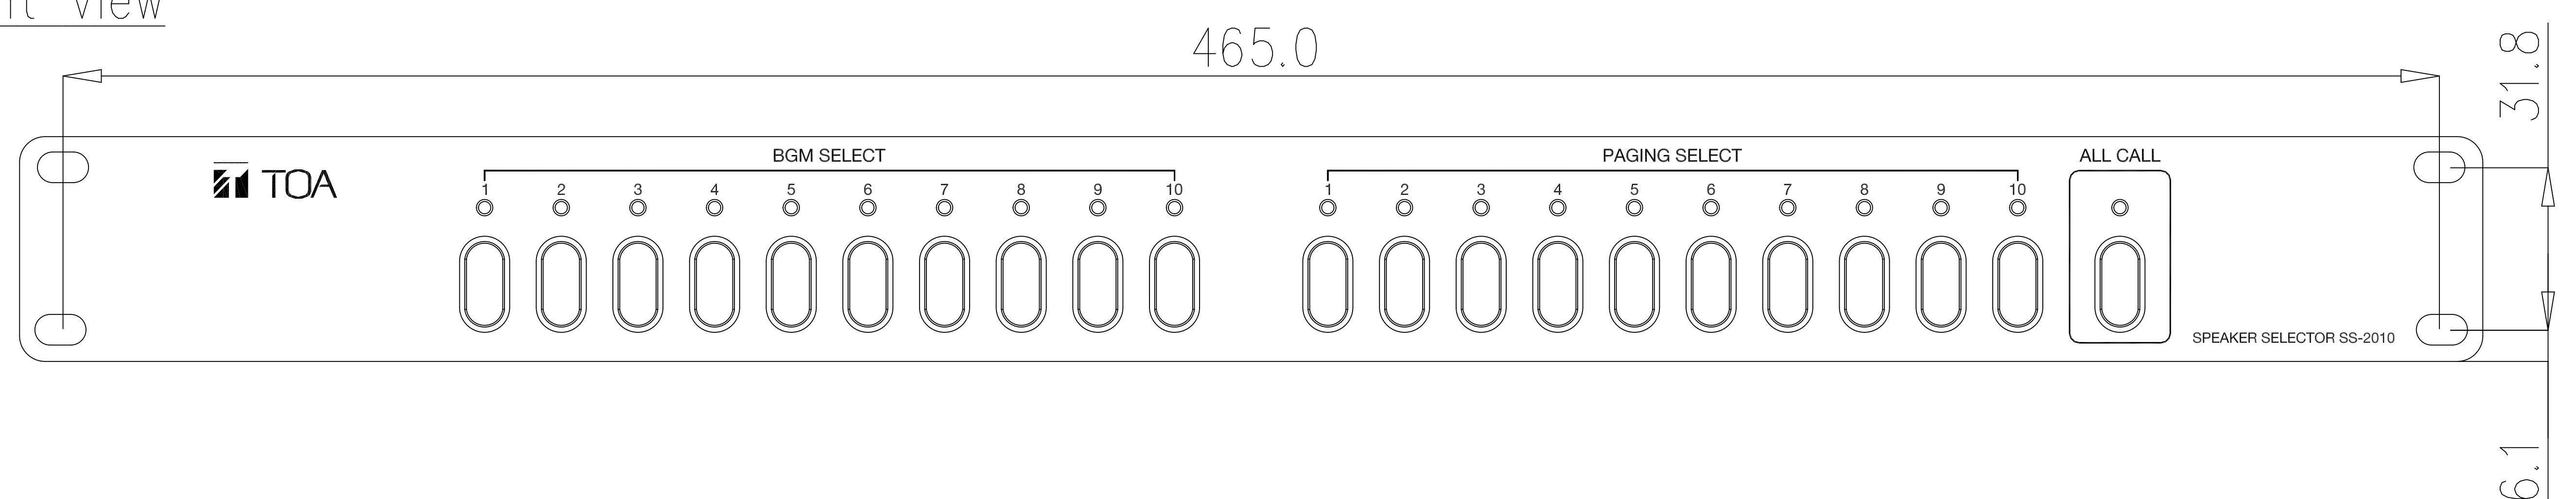

Side View

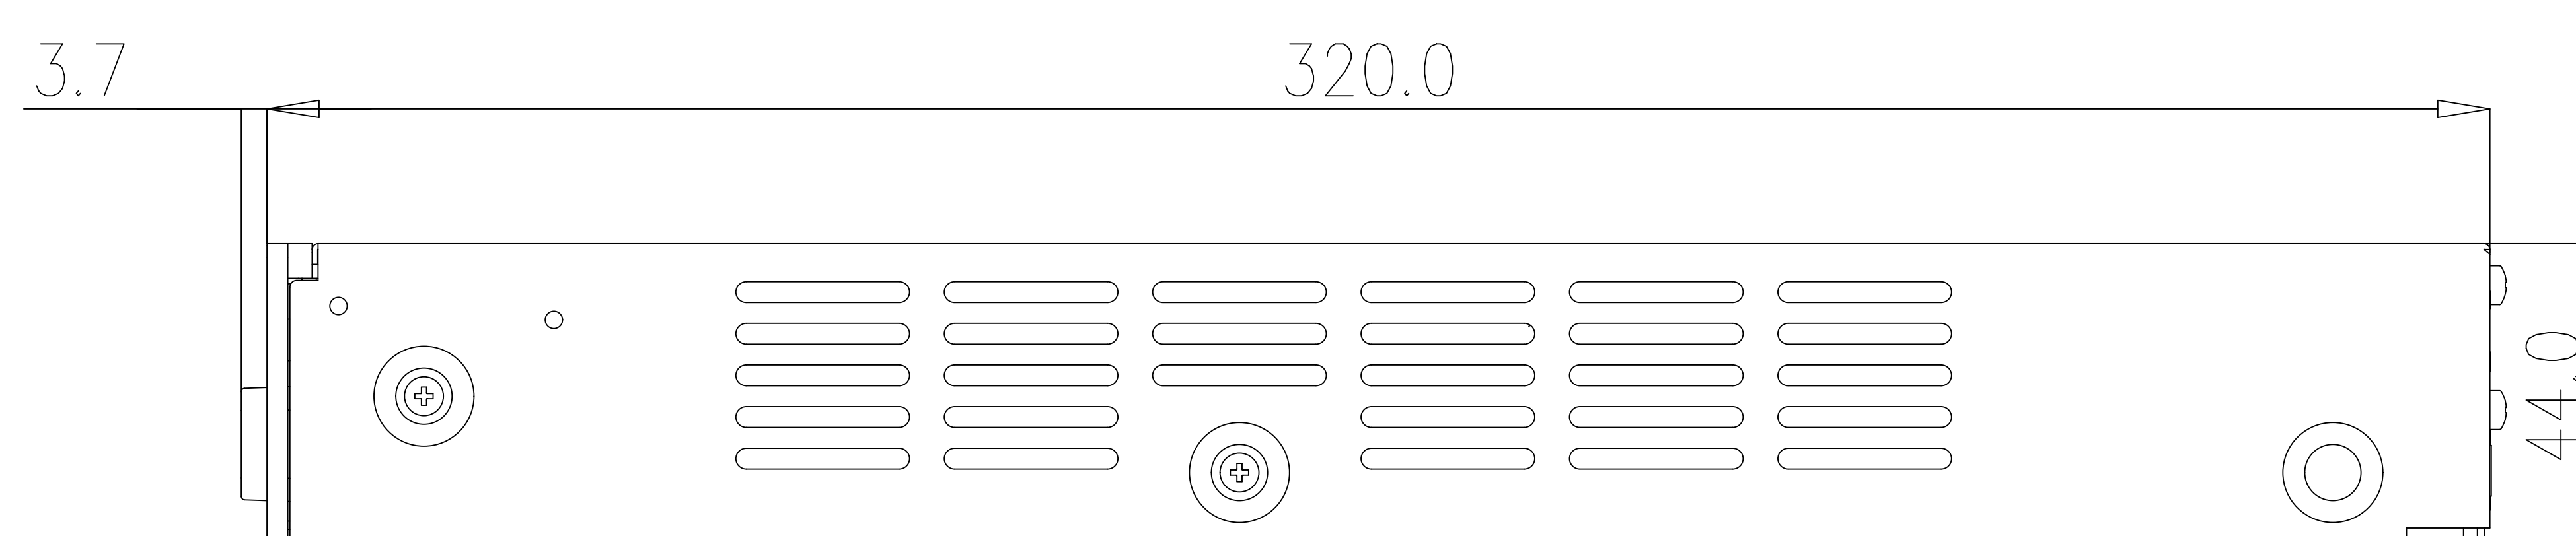

UNIT : mm SCALE : 1/3