






T-Sub-AX15B DATA SHEETS

MODEL:

T-Sub-AX15B		1
--------------------	-------	---

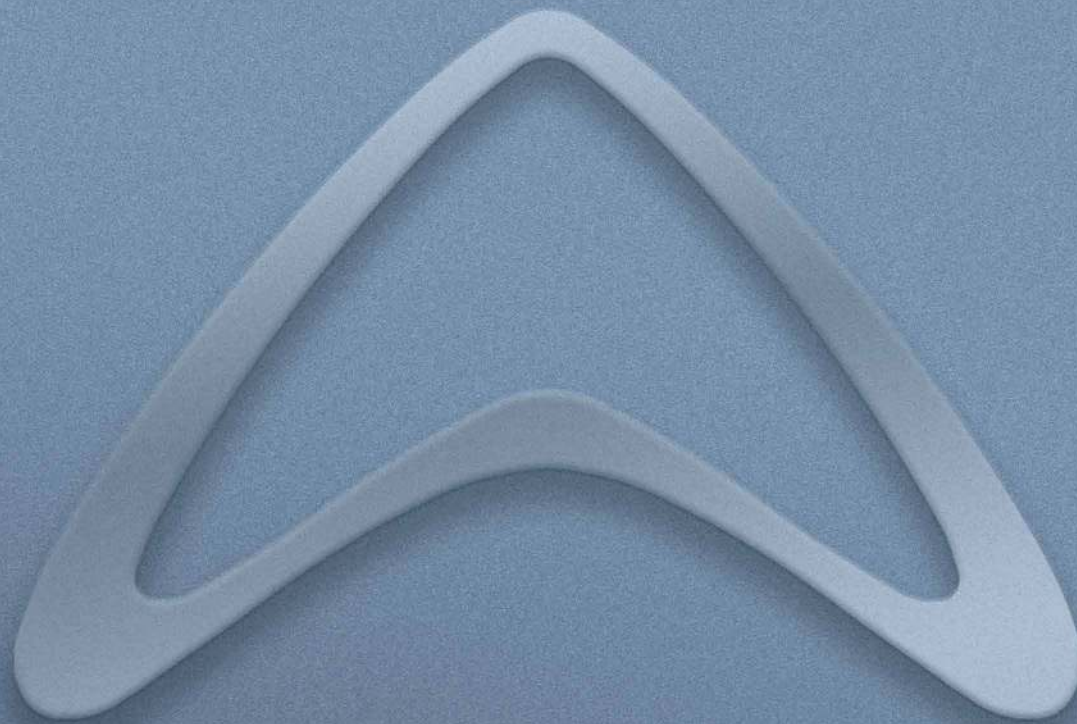

MODEL : **T-Sub-AX15B**

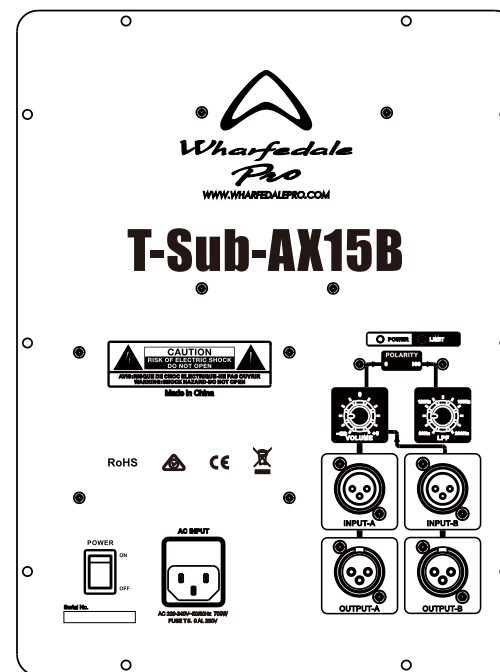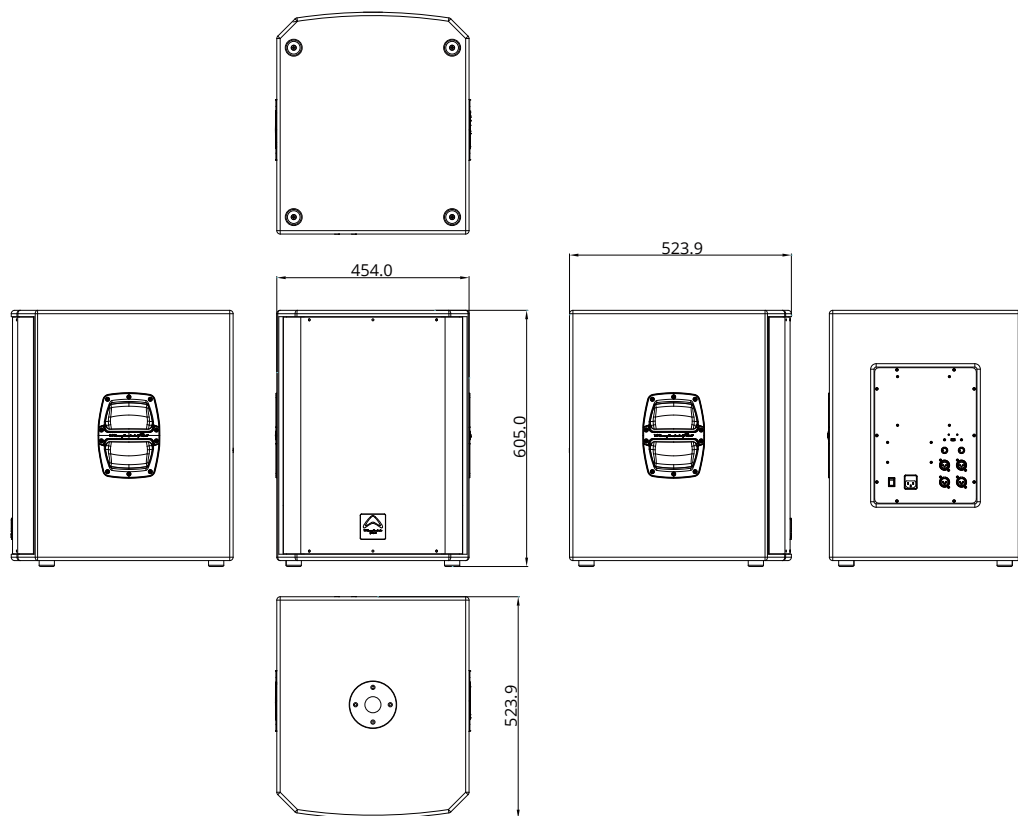

Rear Panel

Model Name	T-Sub-AX15B
System Type	Active 15" Subwoofer
Frequency Response (+/-3dB)	45Hz-200Hz
Sensitivity @ 1W / 1m)	97dB
Maximum SPL (peak @1m)	129dB
Low Frequency Transducer	
Size (mm / inches)	404mm / 15"
Coil Size (mm / inches)	Quad layer 3.0"
Impedance	4Ω
Amplifier	
Low-Frequency Power Amplifier (Class D)	700w Continuous / 1400w Peak
Crossover Frequency	LPF 80-200Hz (adjustable)
Controls	
Amplifier Protection	Yes
Power On Protection	Power switch on / off mute
Thermal Protection	Amplifier shutdown, auto reset
Driver Protection	Yes
DC Protection	Yes
Short Protection	Yes
Limiter Indicator	Red LED
Input type	Balanced
Input Connector	Female XLR
Input Impedance	47KΩ Balanced
Maximum Input Level	5V
Input Sensitivity	-10dB
Line Output Connector	Male XLR
Phase Switch Selection	0° / 180°
AC Power details	
Power Supply	SMPS
AC Power Options	100V-120V and 200V-240V
Power Indicator	Green(back) / Blue logo(front)
Enclosure	
Enclosure Material	15mm Plywood
Colour	Black
Grille	1.5mm steel
Pole Mount (Top)	35mm
Dimensions (Unpacked):	
Height	591mm / 23.27"
Width	454mm / 17.9"
Depth	523.9mm / 20.63"
Dimensions (packed):	
Height	689mm / 27.1"
Width	544mm / 21.4"
Depth	610mm / 24.0"
Weight	
Net Weight (kg / lbs)	25.7kg / 56.5lbs
Gross Weight (kg / lbs)	29.5kg / 64.9lbs



WWW.WHARFEDALEPRO.COM

IAG HOUSE, 13/14 GLEBE ROAD, HUNTINGDON, CAMBRIDGESHIRE,
PE29 7DL, UK
TEL: +44(0) 1480 452 561

September 2020