

# TT 808-AS

## PROFESSIONAL ACTIVE SUBWOOFER

### DESCRIPTION

TT 808-AS is a compact low-profile high-performance active subwoofer. It features two vented-loaded 8" cone woofers powered by a 1000 Watts two-channel amplifier -one for each woofer- on a baltic birch plywood cabinet painted with black polyurea and weatherproof treatment. Management and tuning are available via RDNet software or using the two preset buttons, a polarity button, and a variable delay accessible from the back panel. The cabinet features rubber feet on two sides and two threaded pole-mounts for horizontal and vertical placement. Two stabilizing brackets make the vertical placement stable and firm. TT 808-AS can be used stand-alone, in subwoofer arrays, or as the low-frequency complement for TT 515-A speaker.

### FEATURES


- 129 dB max SPL
- 40 Hz to 400 Hz frequency range
- 1000 W RMS Class-D Amplifier
- 2 x 8" neodymium woofers, 2.5" v.c
- RDNet on board
- Bass Motion Control excursion management
- Flexible Rigging
- Rotatable TT+ Logo








## TECHNICAL SPECIFICATIONS

|                                  |                        |                                       |
|----------------------------------|------------------------|---------------------------------------|
| <b>Acoustical specifications</b> | Frequency Response:    | 40 Hz ÷ 400 Hz                        |
|                                  | Max SPL @ 1m:          | 129 dB                                |
| <b>Transducers</b>               | Woofers:               | 2 x 8" neo, 2.5" v.c                  |
| <b>Input/Output section</b>      | Input signal:          | bal/unbal                             |
|                                  | Input connectors:      | XLR, RDNet Ethercon                   |
|                                  | Output connectors:     | XLR, RDNet Ethercon                   |
|                                  | Input sensitivity:     | -2 dBu/+4 dBu                         |
| <b>Processor section</b>         | Protections:           | Excurs.                               |
|                                  | Limiter:               | Fast Limiter                          |
|                                  | Controls:              | Gain, Equalization, ByPass on board   |
|                                  | RDNet:                 | Yes                                   |
| <b>Power section</b>             | Total Power:           | 2000 W Peak, 1000 W RMS               |
|                                  | Low frequencies:       | 2000 W Peak, 1000 W RMS               |
|                                  | Cooling:               | Convection                            |
|                                  | Connections:           | Powercon IN/OUT                       |
| <b>Standard compliance</b>       | CE marking:            | Yes                                   |
| <b>Physical specifications</b>   | Cabinet/Case Material: | Baltic birch plywood                  |
|                                  | Hardware:              | 2X M20 TOP AND SIDE<br>8X M10 2X SIDE |
|                                  | Handles:               | 2 1 X SIDE                            |
|                                  | Grille:                | Steel                                 |
|                                  | Color:                 | Black                                 |
| <b>Size</b>                      | Height:                | 243.5 mm / 9.59 inches                |
|                                  | Width:                 | 603.5 mm / 23.76 inches               |
|                                  | Depth:                 | 430 mm / 16.93 inches                 |
|                                  | Weight:                | 20 kg / 44.09 lbs                     |
| <b>Shipping informations</b>     | Package Height:        | 290 mm / 11.42 inches                 |
|                                  | Package Width:         | 480 mm / 18.9 inches                  |
|                                  | Package Depth:         | 650 mm / 25.59 inches                 |
|                                  | Package Weight:        | 21 kg / 46.3 lbs                      |

## PART NUMBER

- |                   |                   |
|-------------------|-------------------|
| • <b>13000731</b> | • <b>13000693</b> |
| TT 808-AS         | TT 808-AS         |
| 115V              | 220-240V          |
| EAN 8024530019600 | EAN 8024530019532 |

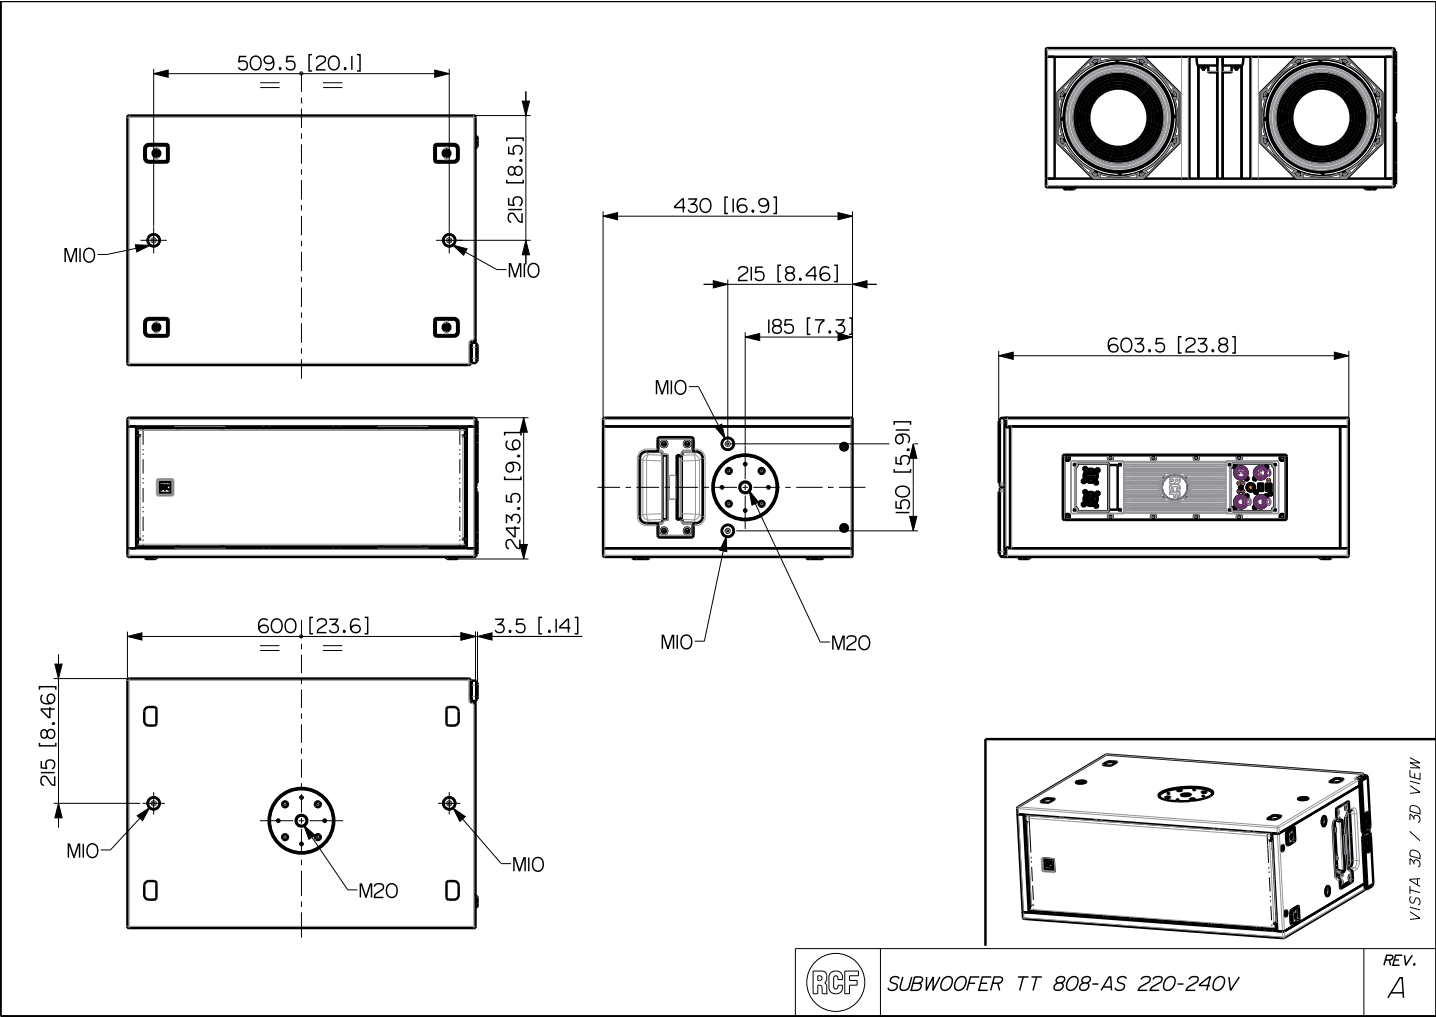

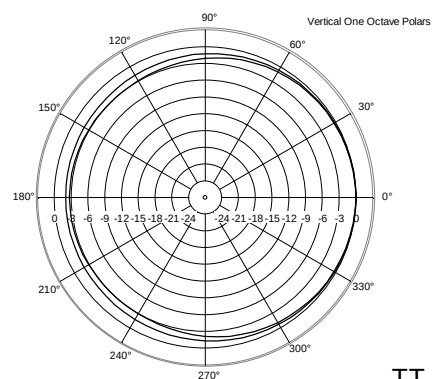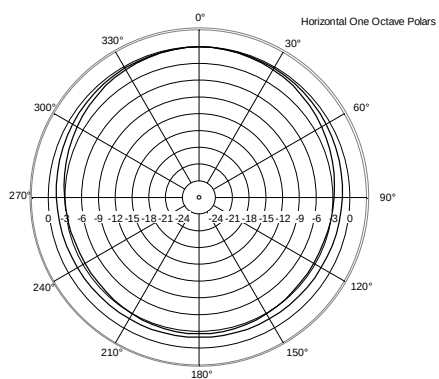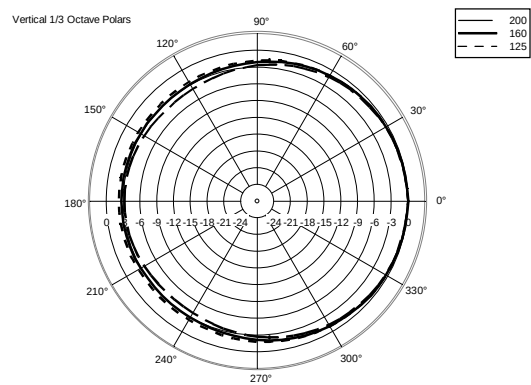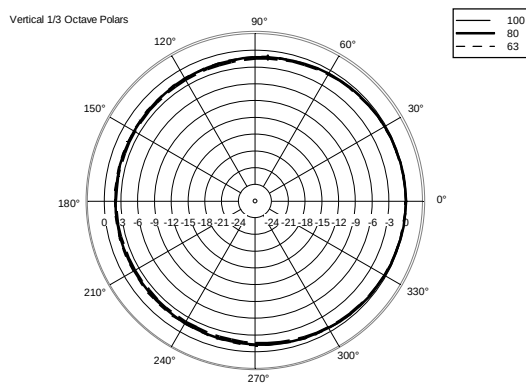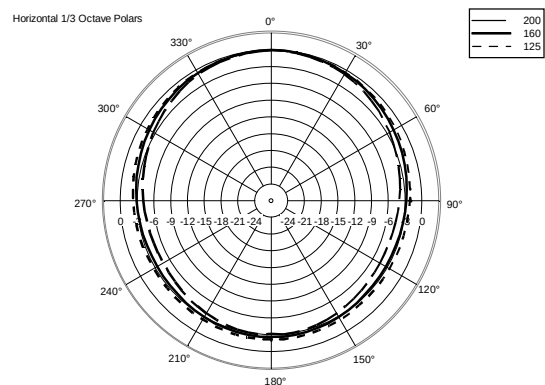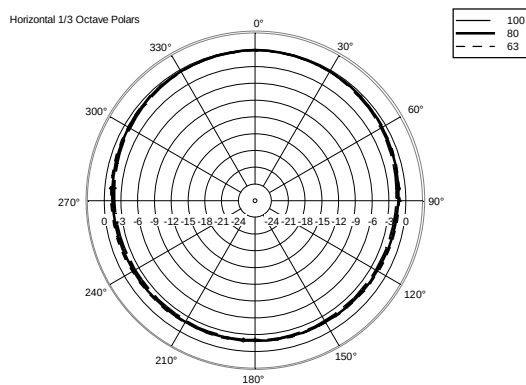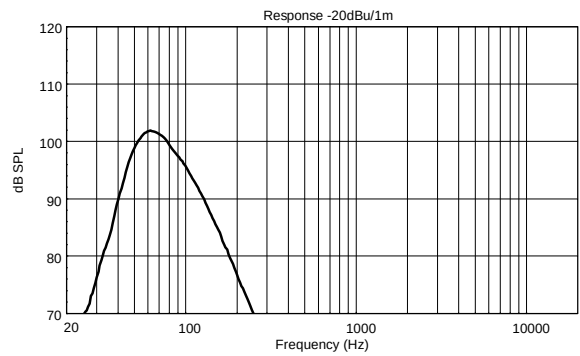

**ACCESSORIES**

AC PM-M20

PART NUMBER **13360067**  
EAN: 8024530014599



AC PMX POLE MOUNT M20

PART NUMBER **13360232**  
EAN: 8024530010058



COVER CVR TT 808

PART NUMBER **13360486**  
EAN:



RAIN PROTECTION RP 1X HDL 6

PART NUMBER **13360381**  
EAN: 8024530015169